

- ✓ **Controls Echo & Reverb**
- ✓ **Reduces Airborne Sound Transmission**
- ✓ **Fast and Easy Install**
- ✓ **Class A Fire Rated**
- ✓ **Renewable/Recycled Fibers**
- ✓ **Low Cost per Sq Ft**




CELLULOSE-BASED ACOUSTICAL & THERMAL PANELS
90% + RECYCLED CONTENT

Material:	Cellulose, Recycled Cotton, and PET Fibers
Patterns:	Fibrous, Flexible
Features:	Low Cost, Highly Absorptive, High R-value, Lightweight, Mold Resistant
Application:	DIY Acoustic Panels, Acoustical Backer, Restaurants, Bars, Offices, Schools, Gymnasiums, Hotels, Houses Of Worship, Entertainment Venues, Auditoriums
Thickness:	1" (3# & 6#) & 2" (3# only)
Sizes:	24" x 48", 48" x 96"
Density:	3# (6# available via quote)
Color:	Natural
Thermal Resistance:	3.7 per inch
Flammability:	ASTM E84, Class A Flame Spread: 15 Smoke Developed: <450 (Class A)
VOC:	CDPH v1.2 (Pass)
Fungal Resistance:	ASTM C1338 (Pass)
Corrosion Resistance:	ASTM C739 (Pass)
Installation:	Spray Adhesive

Sound Absorption / Noise Reduction Coefficient

Size	Test Mount	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" CelluZorbe (3#)	Wall Mounted	0.10	0.19	0.65	0.97	1.05	1.04	0.70
2" CelluZorbe (3#)	Wall Mounted	0.39	0.63	1.18	1.11	1.06	1.09	1.00
1" CelluZorbe (6#)	Wall Mounted	0.09	0.26	0.84	1.05	1.05	1.05	0.80

Noise Reduction Coefficient

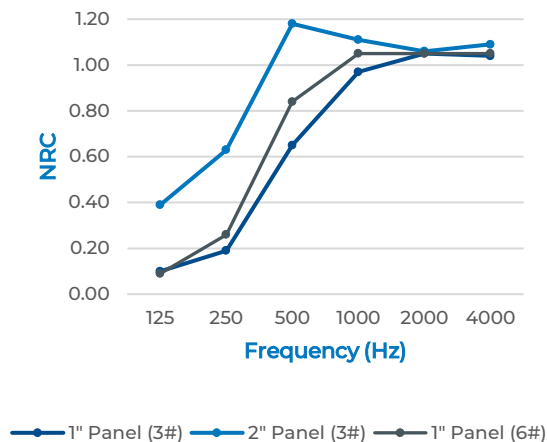

ENVIRONMENTALLY RESPONSIBLE AND SUSTAINABLE:

We manufacture CelluZorbe from a combination of recycled and renewable fibers. The manufacturing process is designed to reduce energy used, air pollution, and waste. No scrap is created during manufacturing. It all goes into the panels. And then the panels themselves are completely recyclable. The cellulose we use in CelluZorbe is made mostly from post-consumer and post-industrial paper, with recycled newspaper being the primary raw material.

ACOUSTICAL PERFORMANCE:

We maximize the sound absorption qualities of CelluZorbe by optimizing the design and density of this fibrous acoustical panel. CelluZorbe acoustical panels achieve NRC ratings of 0.80 at 1" thick and 1.00 for the 2" thick panel.

PRODUCT SAFETY:

CelluZorbe Acoustic & Thermal Panels have a Class A fire rating. They do not produce any harmful airborne particles and will not itch or irritate skin like fiberglass insulation. CelluZorbe can be left exposed or covered up.