


- ✓ **High-Density Floor Isolation Mat**
- ✓ **Treadmill & Equipment Mat**
- ✓ **Reduces Impact Noise**
- ✓ **Works as Finished Flooring**
- ✓ **Flame & Chemical Resistant**
- ✓ **Easy to Clean**

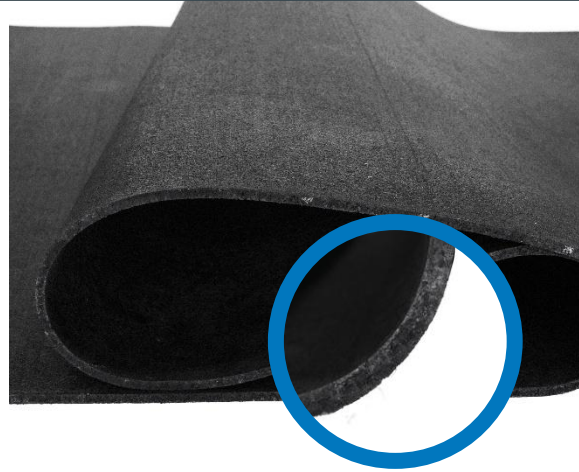

**Material:** Poly-Bound Recycled Rubber (Car Tires)

**Patterns:** Smooth, Dense

**Features:** Extremely Durable, Absorbs Shocks & Isolates Vibration, Easy to Clean, Non-Slip

**Application:** Isolation Mats for Equipment, Drum Mats, Treadmill Mats, Washers & Dryers, Refrigerators, Home Gyms, Golf Simulators, and More

**Thickness:** 1/4" or 1/2"

**Sizes:** 48" x 72" (4' x 6")

**Weight:** 30 lbs (1/4" thick) | 60 lbs (1/2" thick)

**Color:** Black

**Flammability:** Passes ASTM D2859

**Installation:** Roll Out or Lay on Floor

## Material Testing

| Item                                          | Test Standard | Result                               |
|-----------------------------------------------|---------------|--------------------------------------|
| Tensile Strength                              | ASTM D-412    | 266 PSI                              |
| Density                                       | ASTM D-3676   | 65 lbs / cubic foot                  |
| Tear Resistance                               | ASTM D-413    | 155%                                 |
| Hardness                                      | ASTM D-2240   | Shore A 65 +/- 5                     |
| Compression Set                               | ASTM D-395    | -4.90%                               |
| Slip Resistance                               |               | Pass                                 |
| Coefficient of Friction                       | ASTM D-2047   | > 0.8                                |
| Flammability                                  | ASTM D2859    | Pass                                 |
| Resistance to Chemicals                       | F-925-02      | Resistant to most acids and chlorine |
| VOC Emissions                                 | ASTM DS-116   | 0.5 mg/m2 or less                    |
| Sound Transmission Class (STC)                | ASTM E-90     | 59                                   |
| Impact Insulation Class (IIC)                 | ASTM E-492    | 69                                   |
| Delta Impact Insulation Class ( $\Delta$ IIC) | ASTM E-2179   | 34                                   |