


- ✓ **High-Density Roll Flooring**
- ✓ **Gym & Warehouse Impact Flooring**
- ✓ **Reduces Impact & Vibration**
- ✓ **Non-Slip Finished Flooring**
- ✓ **Flame & Chemical Resistant**
- ✓ **Easy to Clean**

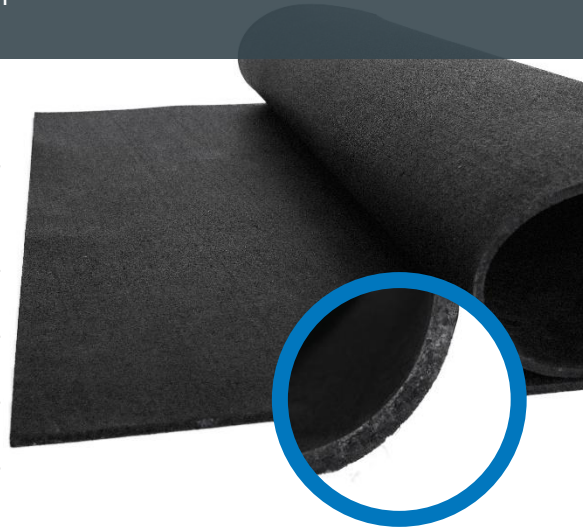

Material: Poly-Bound Recycled Rubber (Car Tires)

Patterns: Smooth, Dense

Features: Extremely Durable, Absorbs Impact & Vibration, Easy to Clean, Non-Slip

Application: Commercial & Home Gyms, Warehouses, Military Bases, Weight Rooms, Sport Surfaces, Basement Floor, Playroom, Pet Facilities, Decks, Patios, Boat Docks, Baseball Dugouts, Playgrounds, and More

Thickness: 1/4", 8mm, 3/8", 1/2", 3/4"

Width: 4' (48") Wide Rolls

Length: 15' or 25' Long Rolls (Call for 50' and Custom Lengths)

Weight per Sq Ft: 1.6 lbs (1/4") | 1.9 lbs (8mm) | 2.2 lbs (3/8") | 3 lbs (1/2") | 4 lbs (3/4")

Color: Black

Density: 65 lbs/cubic foot

Flammability: Passes ASTM D2859

VOC: 0.5 mg/m2 or less

Installation: Glue-Down (Permanent) or Double-Sided Tape (Temporary/Low-Traffic)

Material Testing

Item	Test Standard	Result
Tensile Strength	ASTM D-412	266 PSI
Density	ASTM D-3676	65 lbs / cubic foot
Tear Resistance	ASTM D-413	155%
Hardness	ASTM D-2240	Shore A 65 +/- 5
Compression Set	ASTM D-395	-4.90%
Slip Resistance	—	Pass
Coefficient of Friction	ASTM D-2047	> 0.8
Flammability	ASTM D2859	Pass
Resistance to Chemicals	F-925-02	Resistant to most acids and chlorine
VOC Emissions	ASTM DS-116	0.5 mg/m2 or less
Sound Transmission Class (STC)	ASTM E-90	59
Impact Insulation Class (IIC)	ASTM E-492	69
Delta Impact Insulation Class (Δ IIC)	ASTM E-2179	34