


SOUND LOCK DOOR FRAME GASKET TAPE

SPEC SHEET

- ✓ **Seals Door Jambs**
- ✓ **UL Fire Rated**
- ✓ **Easy to Peel & Stick**
- ✓ **Combine with a Sound Lock Bottom Seal**

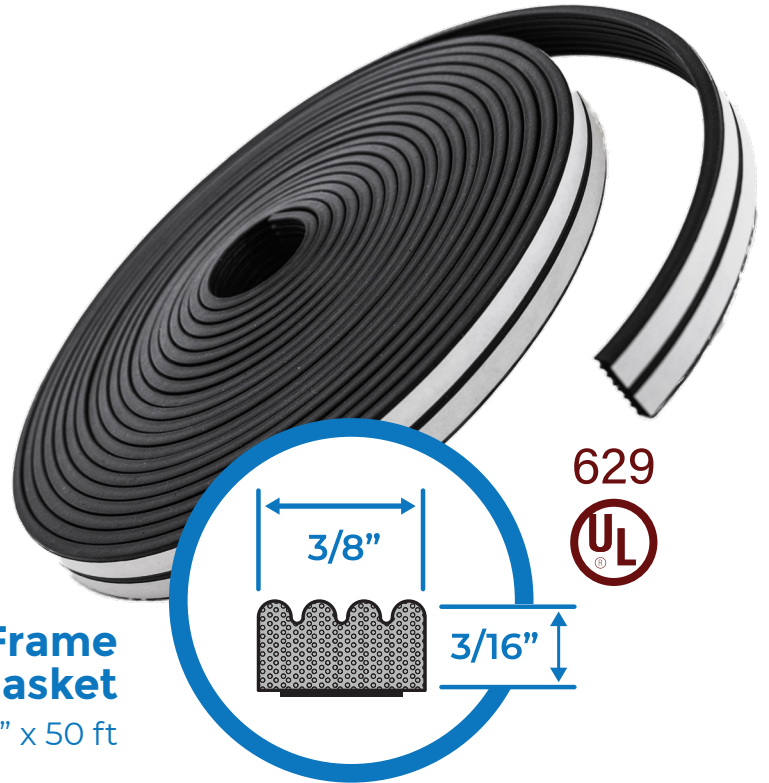

Material: Neoprene

Thickness: 3/16"

Width: 3/8"

Length: 50'

Color: Black

Flammability: UL Fire Rated for UL10B

Installation: Self-adhesive Sound Lock Door Frame Gasket Tape should be applied to a clean, dry door frame. Recommended application temperature: 50°F to 100°F