

SPECTRUM

SPEC SHEET

- ✓ Liquid vibration damping
- ✓ Excellent adhesion
- ✓ Fire and chemical resistant
- ✓ Waterproof
- ✓ Non-toxic
- ✓ Brush or spray on




Material:	Water-Based Viscoelastic Polymer
Patterns:	Pigmented Liquid or Paste (w/ Stir in Activator)
Features:	Adhesion to Most Substrates, Waterproof, Durable, Non-Toxic, Self-Extinguishing, Chemical Resistant, Lightweight, Odorless
Application:	Automotive (interior, undercoating), sinks, metal furniture, metal roofs, machinery, metal carts, elevators cars, HVAC ducts, trash chutes, any vibrating or rattling metal
Sizes and Weight:	1 Gallon, 5 Gallon 16 Lbs / Gallon (Wet), 11 Lbs / Gallon (Cured)
Color:	Dark Blue (Wet), Black (Cured)
Flammability:	Self-Extinguishing, Temperature Rated to 400°F
Application and Thickness:	Apply in 1mm Layers (0.040") with a Spray Gun, Brush, or Roller 2-3mm (Recommended); 5mm (Maximum)
Cleaning:	Easy Clean Up with Water (Within 30 Minutes)


Noise, Vibration, & Harshness Testing (NVH)

	-5 °C	10 °C	25 °C	40 °C	55 °C
Spectrum (2mm)	0.037	0.083	0.215	0.105	0.034
Spectrum (3mm)	0.066	0.119	0.363	0.258	0.068
Spectrum (5mm)	0.081	0.165	0.534	0.379	0.093


BEFORE DAMPING

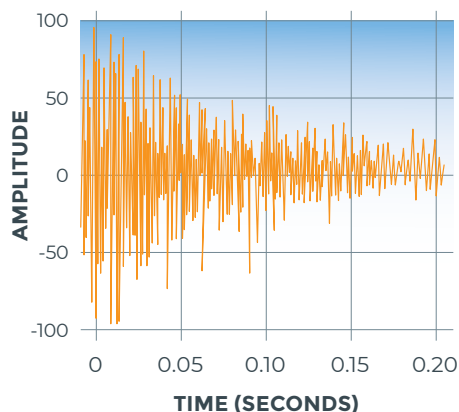

AFTER DAMPING

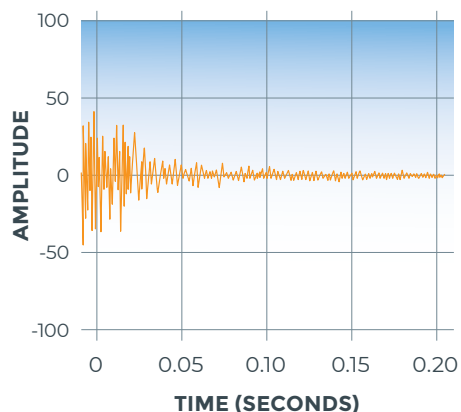

ACOUSTIC LOSS

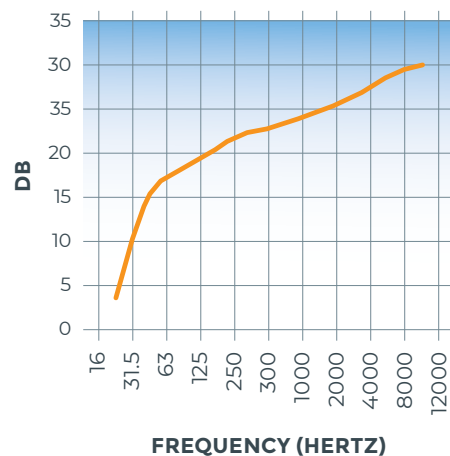

Additional Product Information

Specific Gravity:	1.45
Viscosity:	4000 Centipoise
Odor:	Mild Solvent (Wet); None (Cured)
Boiling Point:	> 400°F
Solubility in Water:	Soluble